



TULDERHOF
a g r o s y s t e m s



Flash 3300 air inlet

In 2007 Tulderhof developed the **Flash**. This air inlet represents a revolutionary evolution in terms of air control.

The throw (air direction) is not affected by the valve (amount of air) Tulderhof patented this and is **the specialist** for this type of air inlet.

Meanwhile, this air inlet has proven its value in hundreds of houses around the world. Tulderhof gives you a **guarantee of 5 years** on these air inlets.

Functioning

The Flash steers the incoming fresh air before it enters the building. The air gets its direction through adjustable spoilers.

These spoilers can be adjusted any moment you like. In practice it normally only happens one time with a smoke test.

The amount of air is regulated with a vertically well insulated moving slide.

Advantages

The flash is suitable for every poultry, pig and calves house. This air inlet is also available in a daylight version. The ideal solution for pig- and calves housing.

The Flash is extremely suitable for those situations with extra high demands for air steering, e.g.:

- ▶ Very wide houses, the Flash steers the air extra deep.
- ▶ Avoiding of obstacles in the house, like cages, laying nests and construction beams.
- ▶ No airflow in the nests.

*Conditions of guarantee : contact Tulderhof to know them.

▶ 5 years guarantee

▶ Patented

▶ Flexible air flow

▶ Simple Mounting

▶ Reliable

▶ Insulated

▶ Low transport costs

Watch the Flash in action and look to the videos at
www.tulderhof.com

Technical information

Flash 3300 air inlet - information


Type	F-3300
10 Pa - m ³ /h	2.400
20 Pa - m ³ /h	3.300
30 Pa - m ³ /h	4.100
Surface - cm ²	1.570
Width - mm	580
Height - mm	400
Depth - mm	60



The Flash 3300 is also available in a daylight version.

Pay attention!

The position of the spoilers has a big impact on the capacity of the air inlet. The picture on the right illustrates this for the Flash 3300. Therefore Tulderhof advises to calculate with 10 Pa.

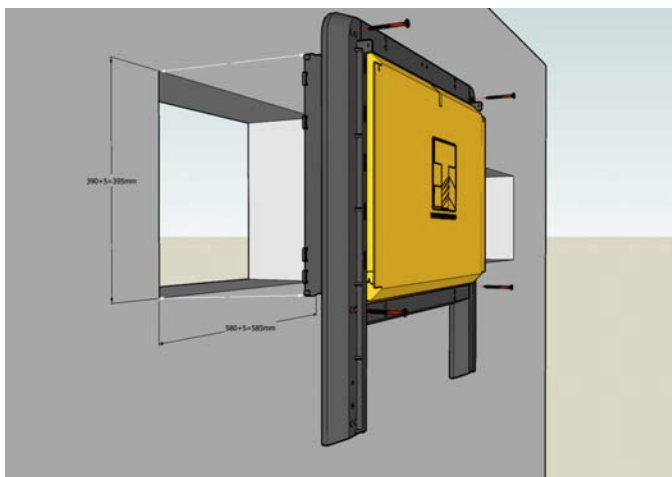

The F-3300 is made of plastic and has a standard size.
The hole in the wall should be 5 mm bigger.



The Flash 3300, just like our other air inlets, can be built in a light street.



Goirleweg 13, 2382 Poppel - Belgium
Tel: +32 14 658 691 Fax: +32 14 659 960
Internet: www.tulderhof.com
Email: info@tulderhof.com