

POWERED BY **SCAN-AIR**

Cover with light trap



Anti wind

Anti rain

UV proof

Black out

Easy

Solid

The covers are developed for all types of air inlets, but fit perfectly on the Flash 3300.

These covers are the solution to reduce influence of rain and wind. With the optional light trap, one can also reduce the incidence of light.

This is highly recommended with rearing and breeder stock.

Material

The black cover is constructed of black UV resistant plastic. It is 600 mm wide. Two covers are 1200 mm wide.

Advantages of the cover:

- › The cover will fit any type of wall
- › Reduces the influence of wind
- › No impact from rain

Advantages of the light trap:


- › Complete black out of the air inlet
- › No attraction of insects because of light shining through the inlet, and therefore less cross over of illnesses



POWERED BY **SCAN-AIR**
Technical information

Cover with light trap	Without light trap	With light trap
Type		
10 Pa - m ³ /h	2625	2000
20 Pa - m ³ /h	3465	2675
Surface - cm ²	2100	1625
Width - mm (X)	670	670
Height - mm (Y)	490	597
Depth - mm (Z)	349	361

Technical information with and without light trap.

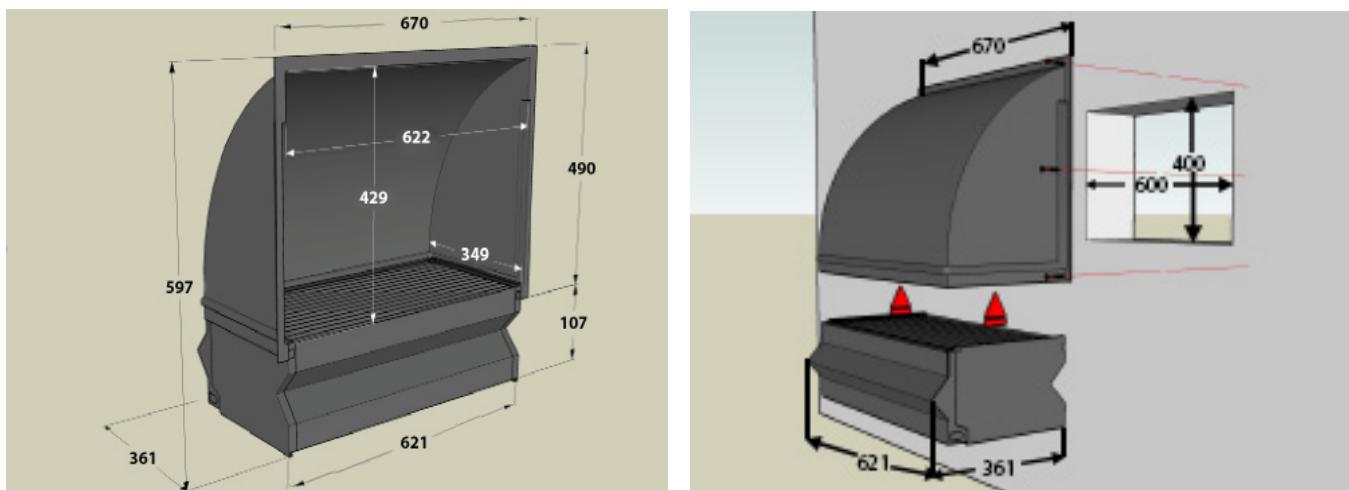

These are standard sizes in mm. Covers can be placed directly next to each other, and therefore are suitable for any type of air inlet.

Inlet per animal	m ³ /h	cm ² at 10 Pa	cm ² at 20 Pa
Species			
Broilers	8-11	5,5-8,0	4,0-5,5
Broilers (breeders)	14	9,8	7,0
Layers	7	4,9	3,5
Rearing layers	5,5	3,8	2,8